

The first time at the state of the state of

ICMP, msg typ	oe, code	checksum	
	process_id		ICMP
Final profile	class=premiumetc	validity	header
version		Total msg length	
IE id = client	ur	nused	•
PC type	OS type,ver OS type,ver		
ethernet	DSL OC3/12	unused	client info.
	max speed avail. (WAN side)	iiio.
	unused		
IE id=proxy	proxy IP addr.	proxy port no.	proxy
programme and the second secon	unused		info
IE id=Appl. type	from web unused	l validity	,
Appl. class	data rate name	BW reqd.	Appl. profile (if from web)
	new appl. name	validity	
	response time	validity	
	unused		
IE id=QOS profile (tr.)	unus	sed	
TCP UDP	ATM T1 E1	FR VPN	Transport
MPLS RSVP	DTM DWDM GSM	TDMA · SS7	QOS profile
	unused		
IE id=QOS sub-profile	unused	validity	*********
tr.sub1 ex: BHLI, ATM addr(if ATM		(if ATM)	Per Protocol
tr.sub2			QOS Profile
	((
		>	
IE id=MAP seq.	unused	validity	
ex:3.1			QOS map
	(order for the client,by serve
	>	>	
	Termination block		

FIG. 2

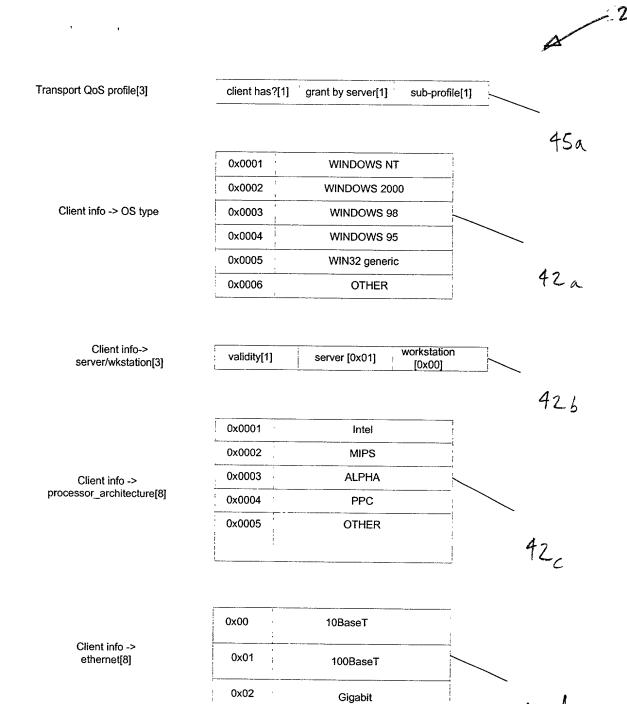


FIG. 3


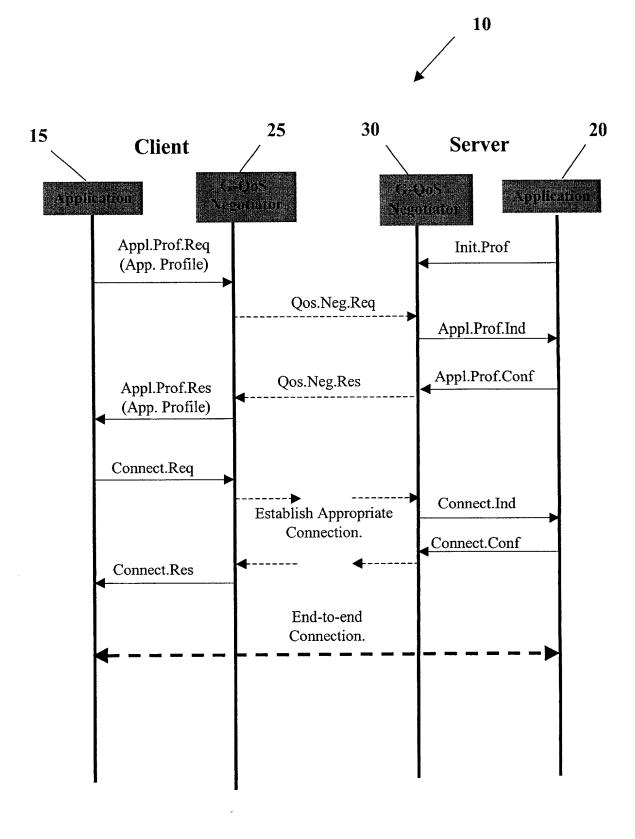


FIG. 4



F1G. 5

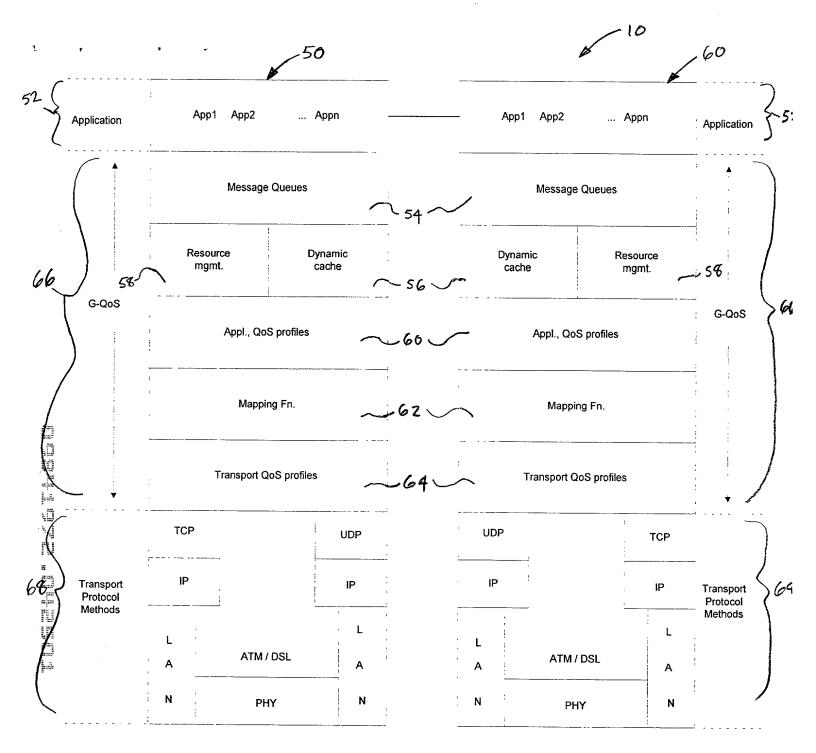